



MPF PRODUCTS INC.


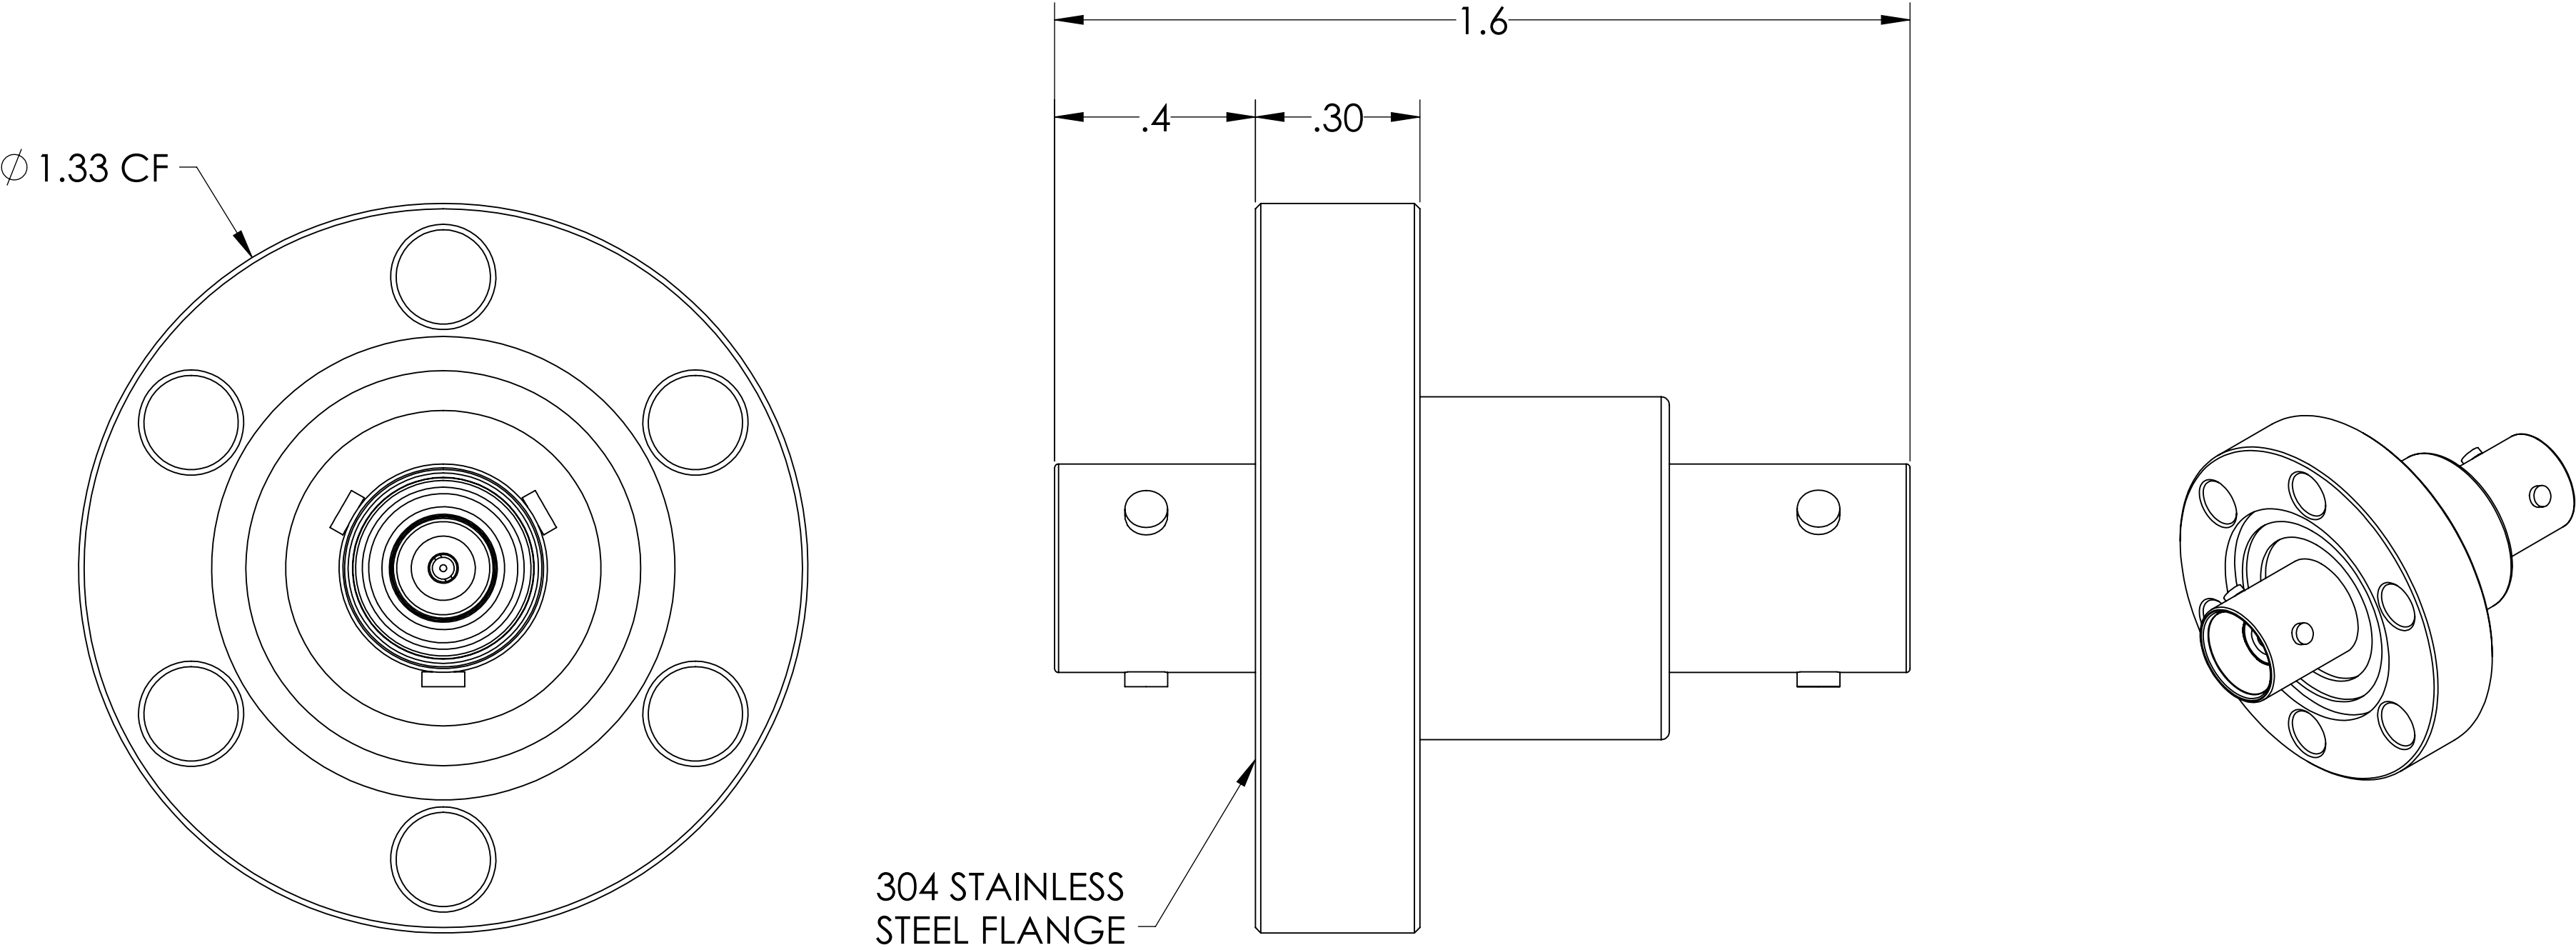


PART #	AIRSIDE CONNECTOR INCLUDED
A18379-1-CF	YES
A18379-2-CF	NO

- NOTE:
- 1. SHIELD: GROUNDED
  - 2. VOLTAGE: 500 VOLTS DC
  - 3. CURRENT: 3 AMPS
  - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
  - 5. IMPEDANCE: NON-CONSTANT

Triaxial Coaxial Feedthrough, 1 Pin, Grounded Shield, Double Ended, 1.33" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015		NAME	DATE
	DRAWN	WJ	9/11/2015
	CHECKED		9/11/2015
	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
			
	APPLICATION		
	NEXT ASSY      USED ON		
FINISH	SURFACE FINISH:  OR BETTER		
	UNLESS OTHERWISE SPECIFIED:		
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		
	MPF PRODUCTS INC. TITLE: TRIAXIAL COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, DOUBLE ENDED, 1.33" CONFLAT FLANGE  DOWNLOADED FROM MPFPI.COM DWG. NO. A18379 REV		
Friday, July 26, 2019 9:52:32 AM			