

MPF PRODUCTS INC.



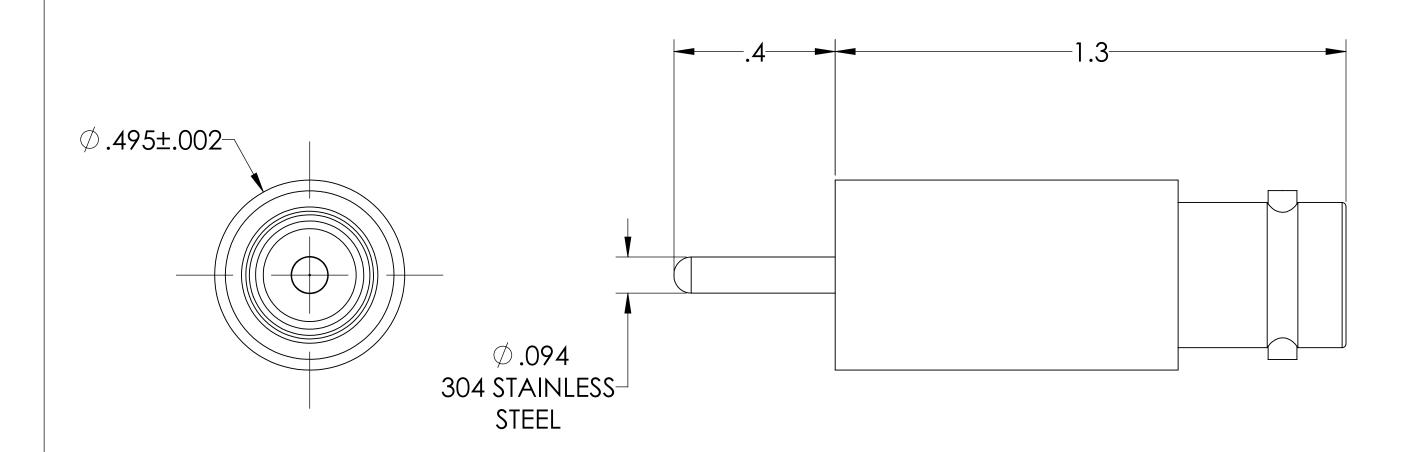

PART #	AIRSIDE CONNECTOR INCLUDED
A0059-1-W	YES
A0059-2-W	NO

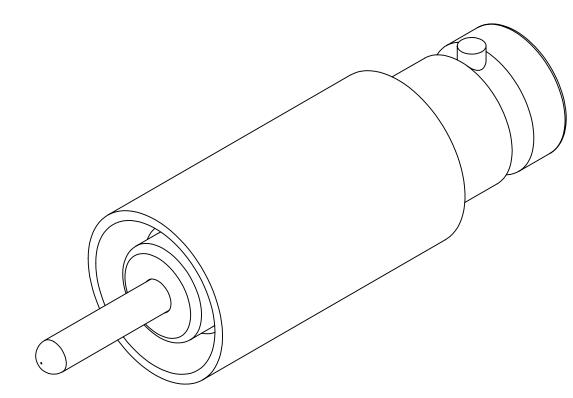

NOTE:

1. SHIELD: GROUNDED

2. VOLTAGE: 500 VOLTS DC

3. CURRENT: 3 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.495" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTA	TION		N/A				
DIMENSIONS ARE IN INCHES		DATE	·					
TOLERANCES:	DRAWN	WJ	9/11/2015	\sim	1PF	PRODUC	:TS 11	۷C.
ANICHI AD-AAACH 170°	CHECKED		9/11/2015	TITL	E:			
ANGULAR: MACH±1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015	BNC COAXIAL				
THREE PLACE DECIMAL ± .015	THIRD ANGLE:			FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 0.495" DIA SS WELD ADAPTER				.
===	APPLICATION							,
MATERIAL								
								R
	NEXT ASSY	ITLICAIR	USED ON					
				DOV	VNLO	ADED FROM MP	FPI.CO	M
FINISH	SURFACE FINIS	H: (OR BETTER	DWC	3. NO).		REV
DI ATINO	UNLESS OTHERWISE SPECIFIED:				A0059			
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Thursday, October 4, 2018 8:25:52 AM				М
WITHOUT THE WRITTEN PERMI						C1	HEET 1	