

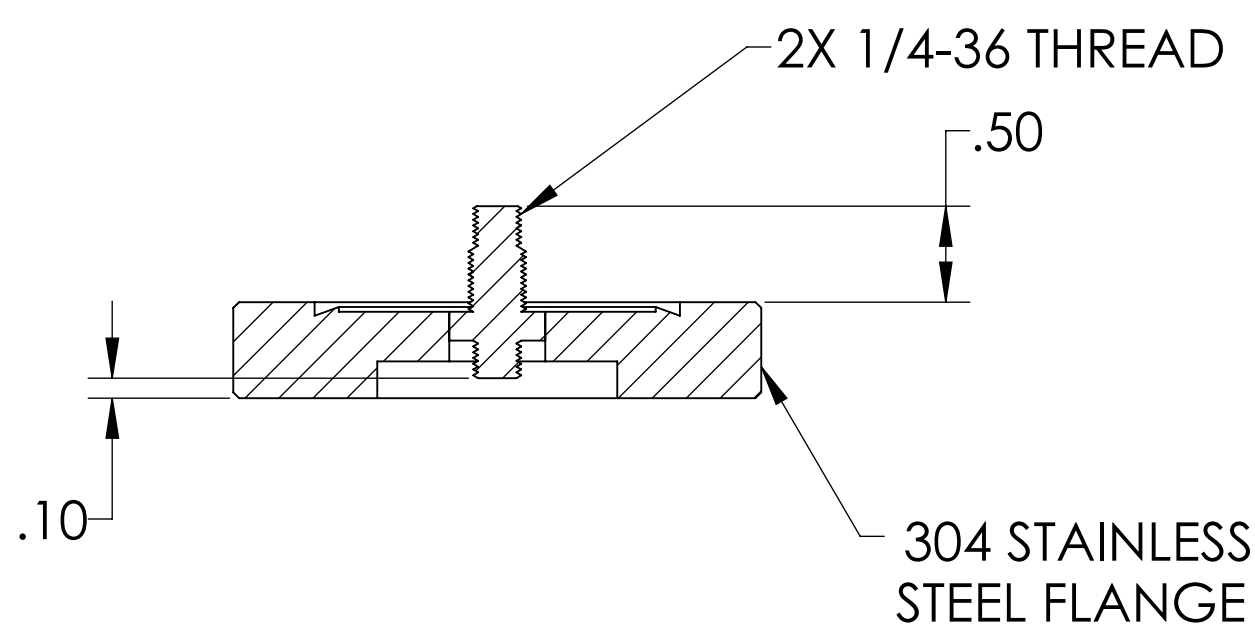


# MPF PRODUCTS INC.

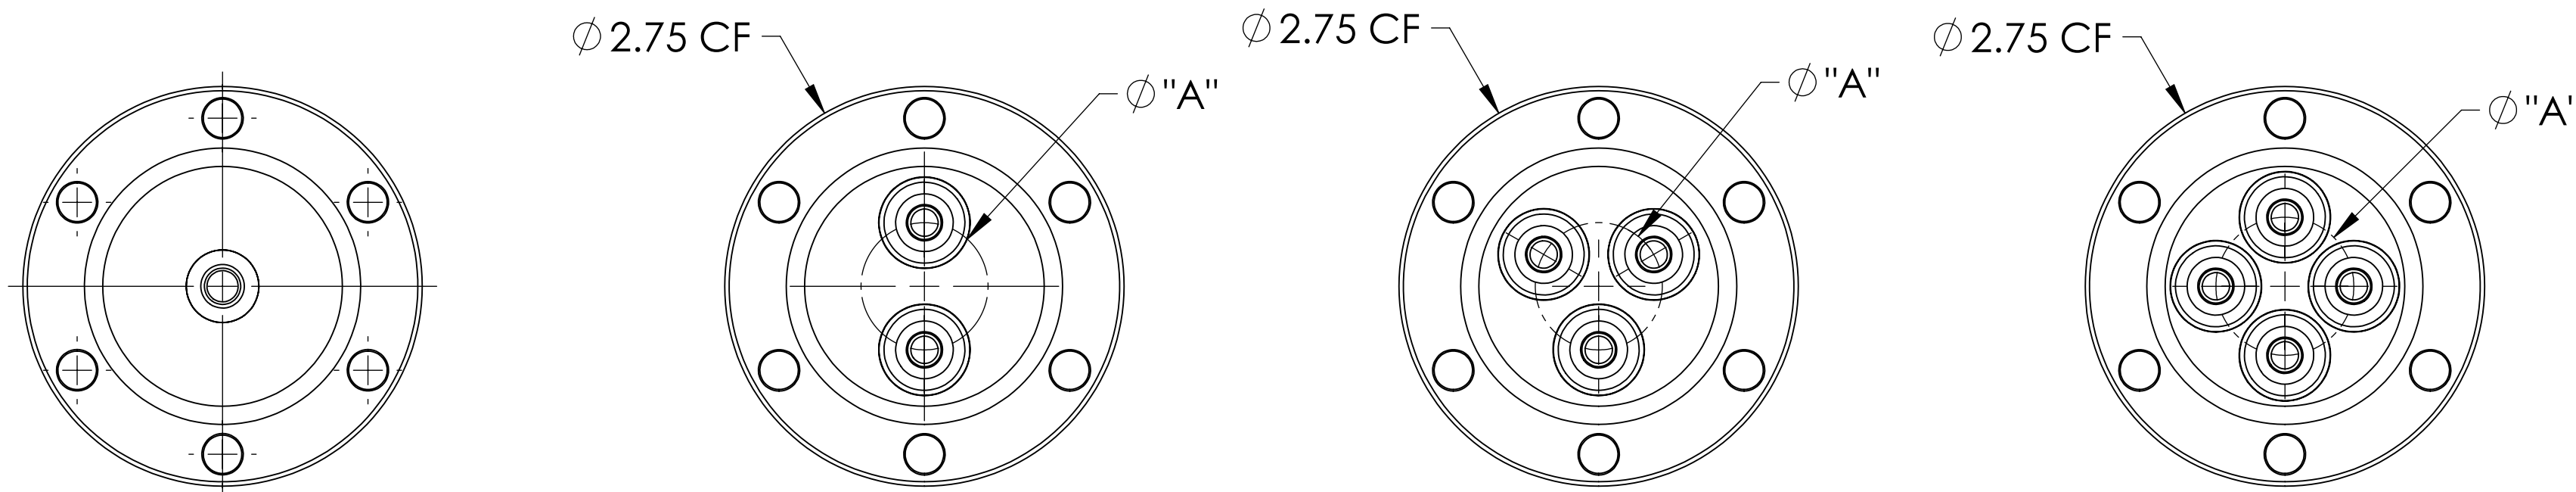

PART #	NUMBER OF PINS	"A" DIM
A12377-1-CF	1	N/A
A12377-2-CF	2	.88
A12377-3-CF	3	.88
A12377-4-CF	4	.95

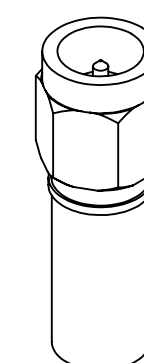

**NOTE:**

1. SHIELD: GROUNDING
2. VOLTAGE: 1000 VOLTS DC
3. CURRENT: 1 AMP
4. TEMPERATURE RATING: -65 TO 200 °C
5. IMPEDANCE: 50 OHM (0-18 GHz)

SMA Coaxial Feedthrough, 50 Ohm, 18 GHz, Grounded Shield, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63/ OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
TITLE:		MPF PRODUCTS INC.
SMA COAXIAL FEEDTHROUGH, 50 OHM, 18GHZ, GROUND SHIELD, 2.75" CONFLAT FLANGE		
DOWNLOADED FROM MPFPI.COM		
DWG. NO.	A12377	REV
Monday, August 5, 2019 9:36:27 AM		