



MPF PRODUCTS INC.

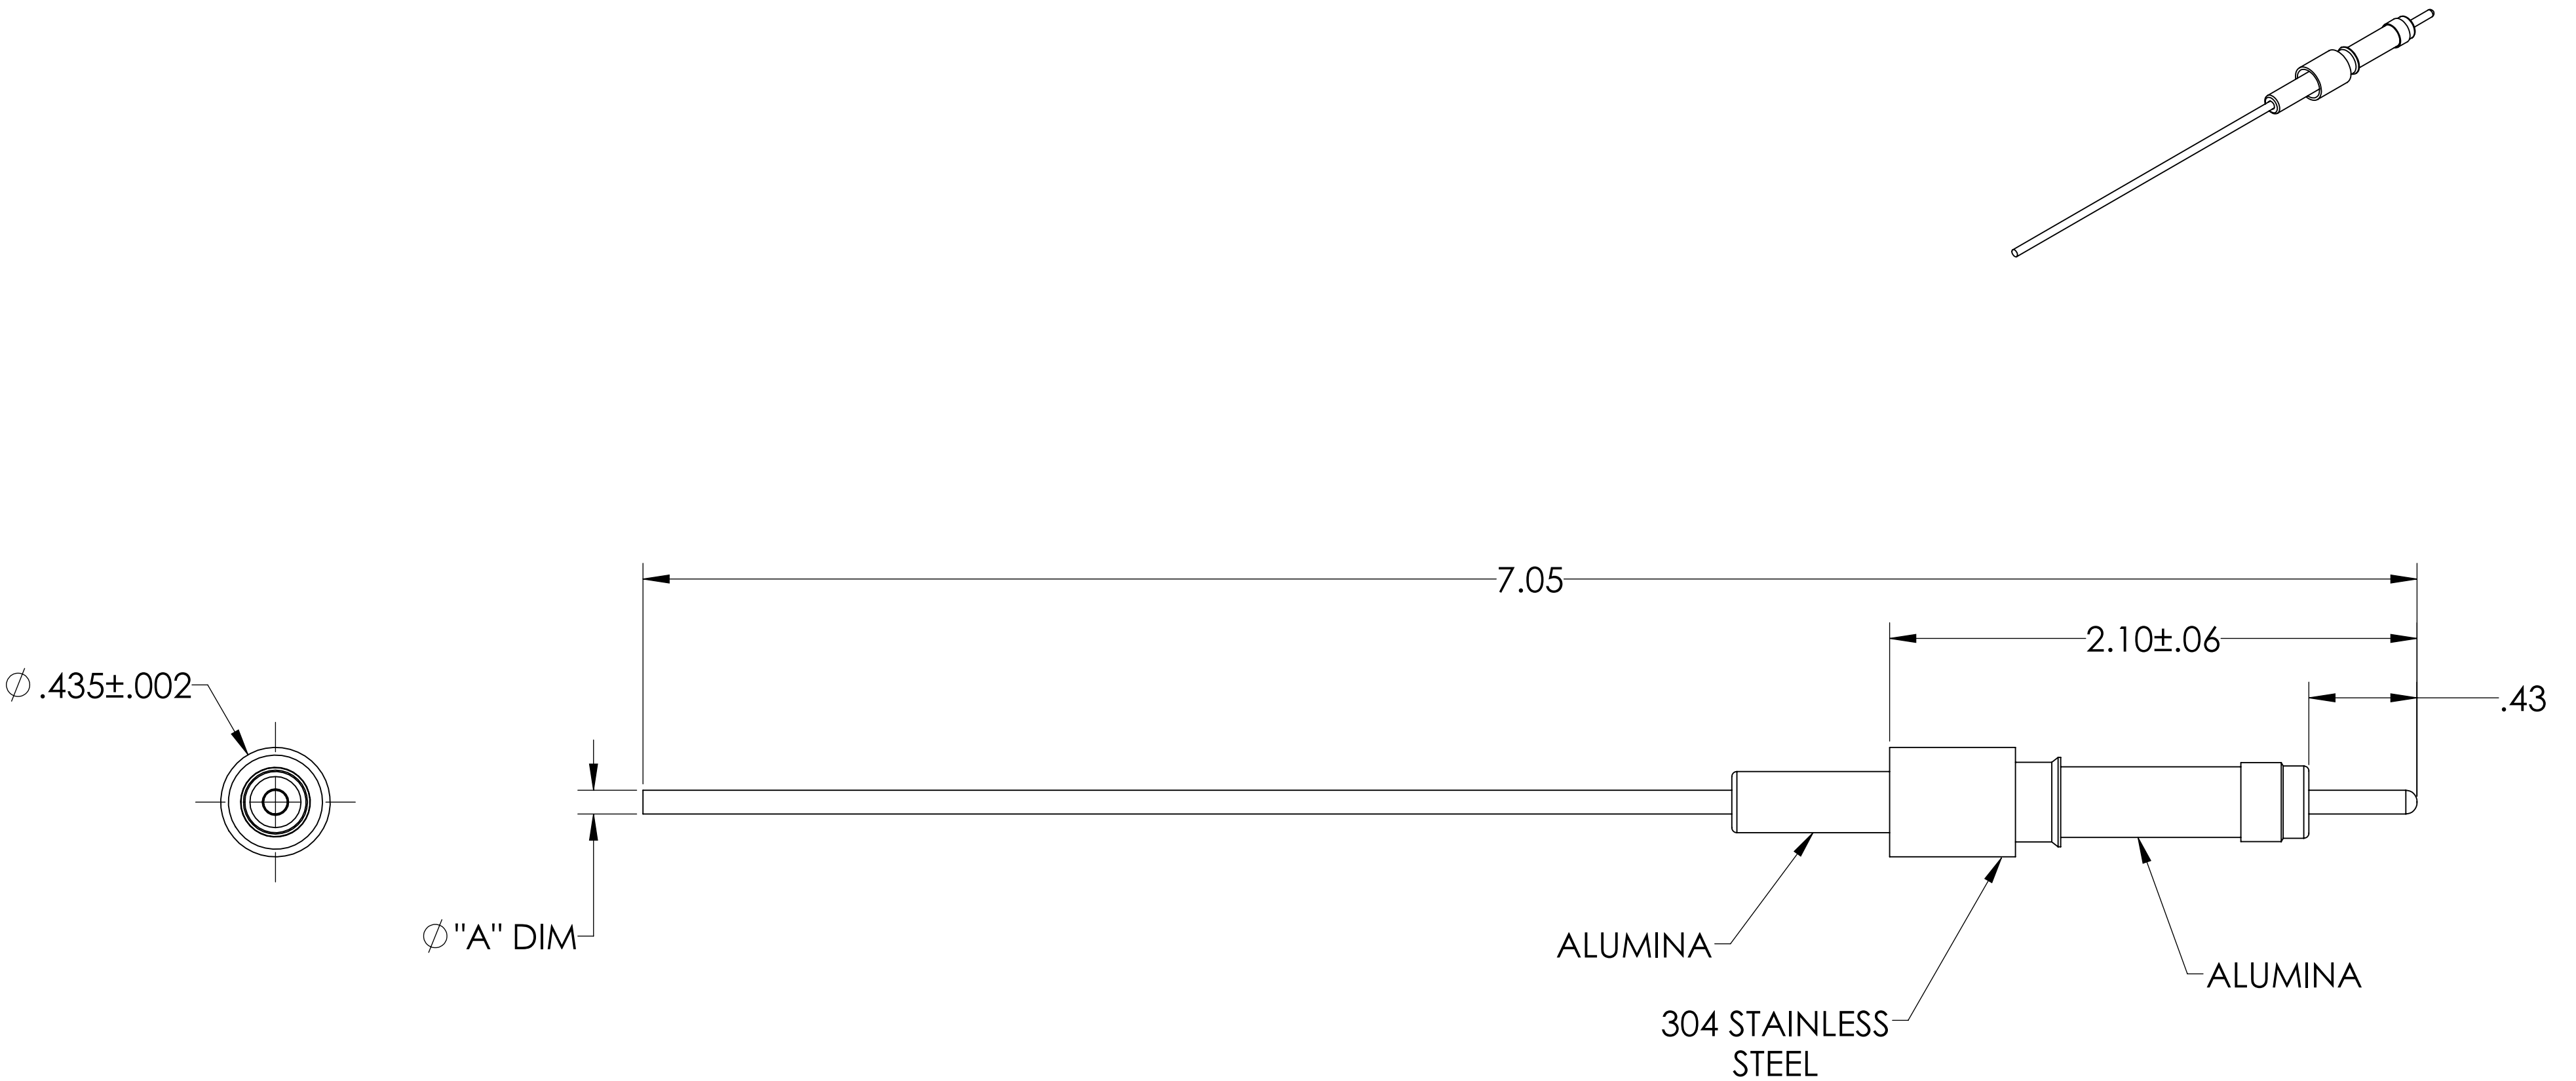


PART #	CONDUCTOR MATERIAL	"A" DIM	CURRENT RATING
A2535-1-W	OFHC COPPER	0.094	50 AMPS
A2535-2-W	NICKEL 200	0.092	15 AMPS
A2535-3-W	304 STN STL	0.094	3 AMP

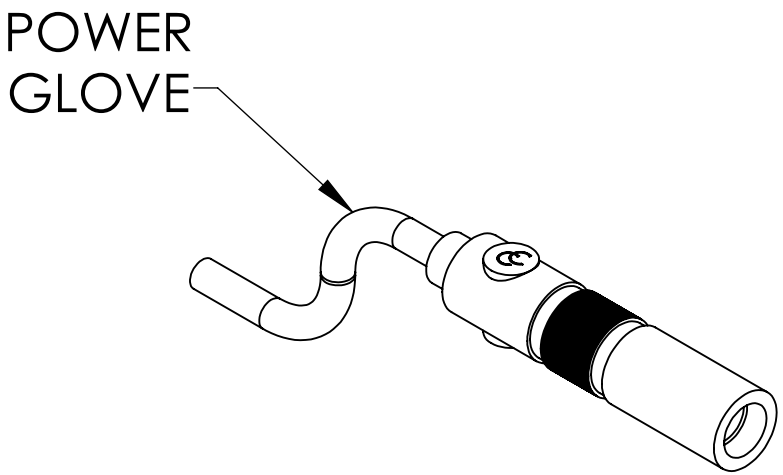

- NOTE:
- 1. VOLTAGE: 10,000 VOLTS DC
 - 2. CURRENT: SEE TABLE
 - 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Glove, 10 KV, 1Pin, 0.0435" Dia. Stainless Steel Weld Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015 THIRD ANGLE:  APPLICATION NEXT ASSY USED ON		NAME	DATE	MPF PRODUCTS INC. TITLE: POWER GLOVE, 10 KV, 1 PIN, 0.435" WELD ADAPTER DOWNLOADED FROM MPFPI.COM DWG. NO. REV		
		DRAWN	WJ			9/11/2015
		CHECKED				9/11/2015
		ENG APPR.	WJ			9/11/2015
MATERIAL		SURFACE FINISH:		UNLESS OTHERWISE SPECIFIED:		
FINISH		63/ OR BETTER		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		
PLATING				A2535		
				Wednesday, November 6, 2019 8:54:35 AM		