

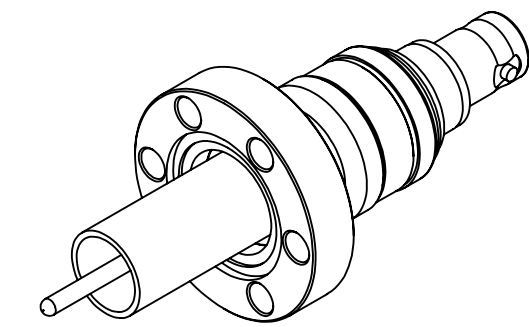


# MPF PRODUCTS INC.

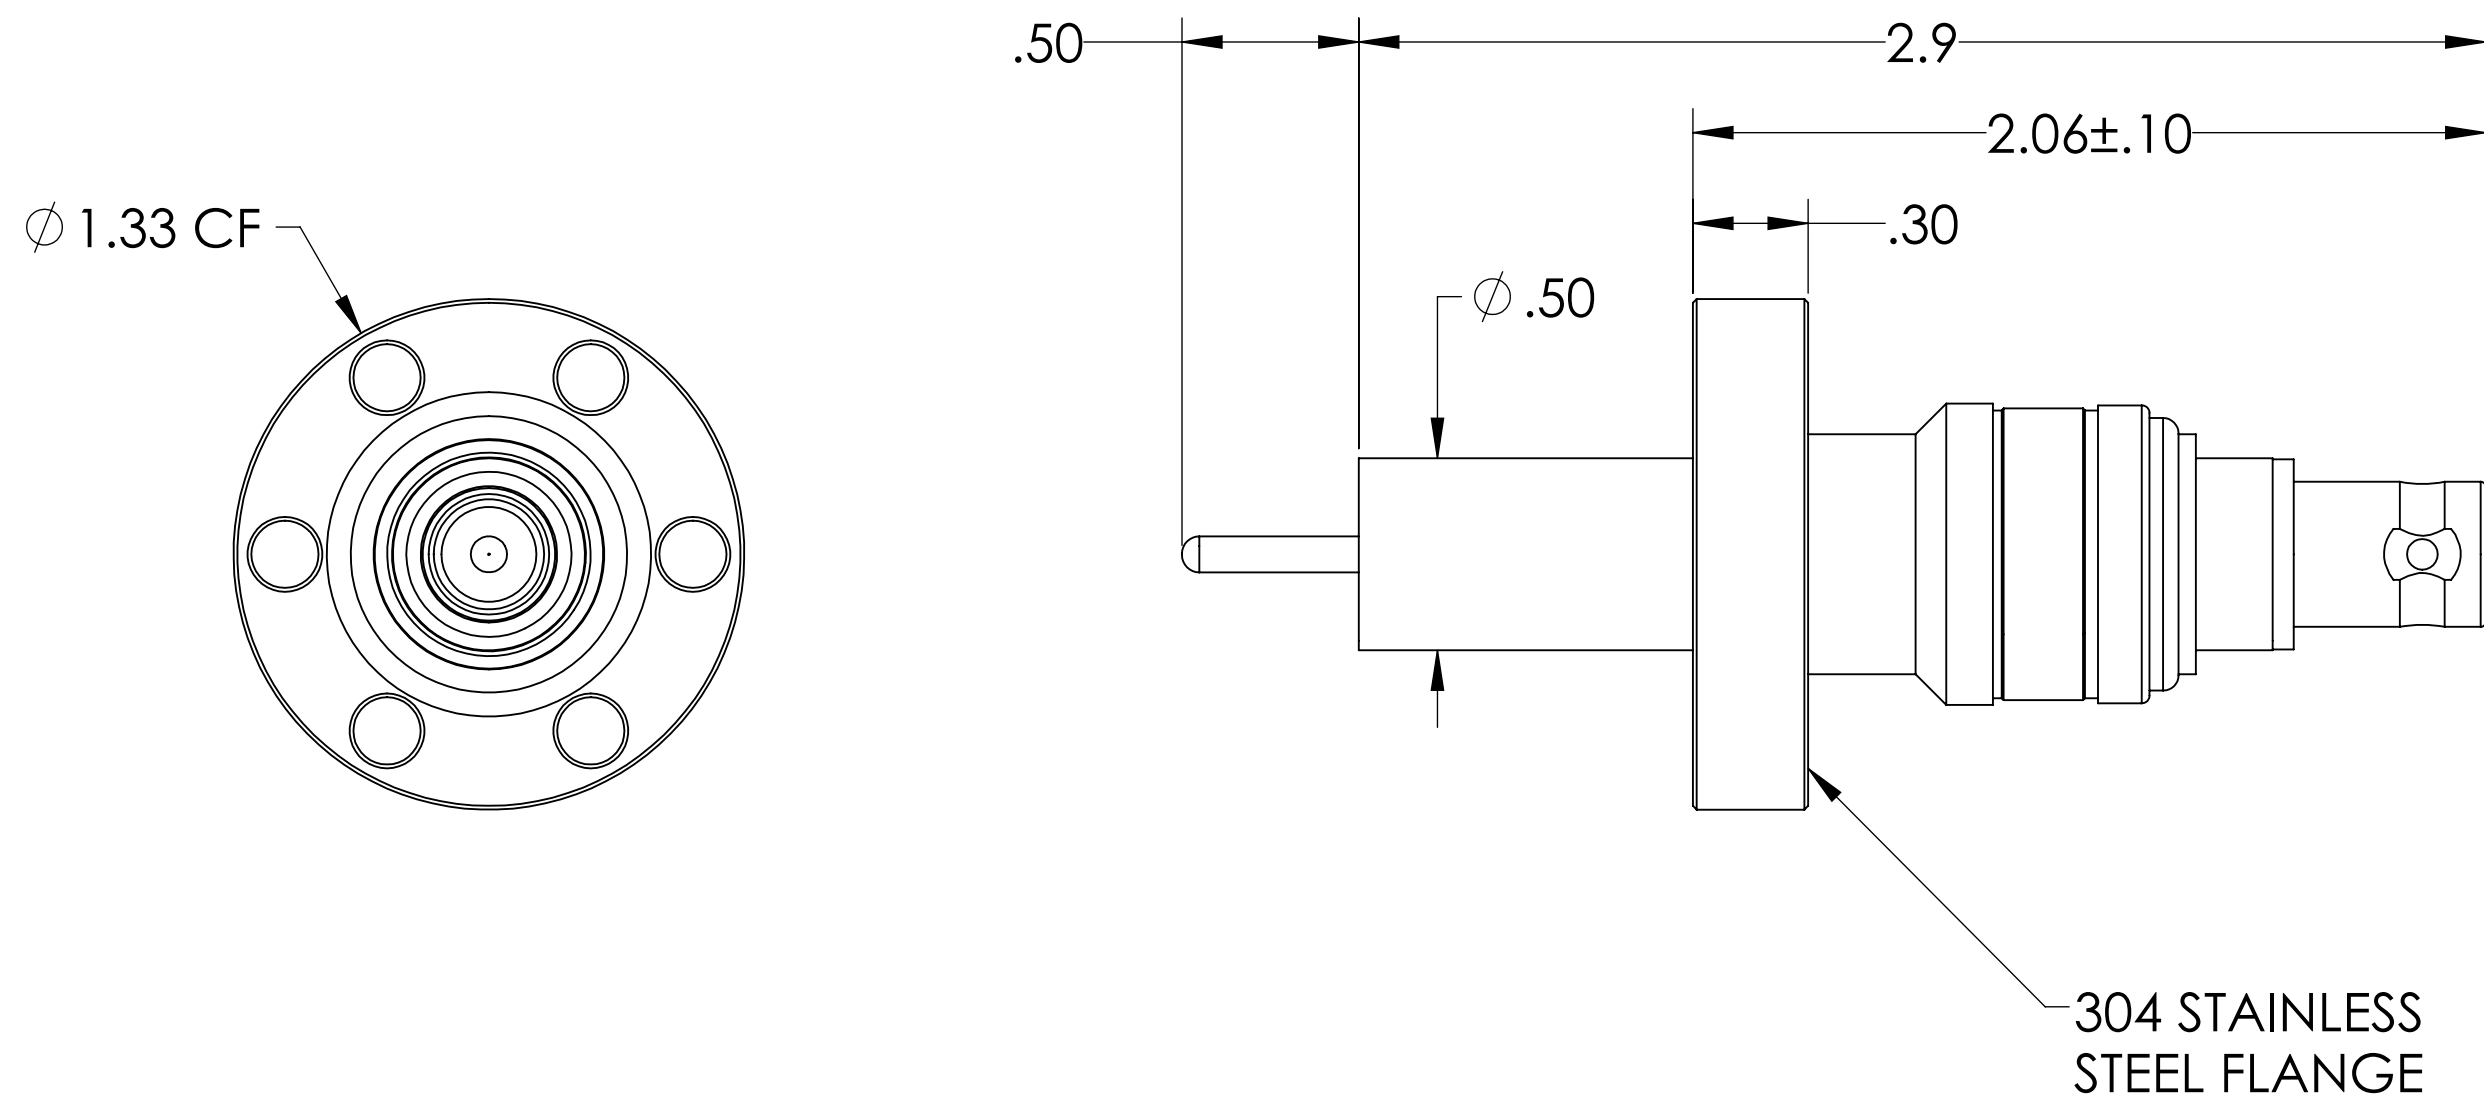

**NOTE:**

1. SHIELD: FLOATING
2. VOLTAGE: 2500 VOLTS DC SHIELD TO GROUND, 5000V PIN TO SHEILD
3. CURRENT: 5 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), -65 TO 165°C ( AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 1 Pin, Floating Shield, 1.33" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°		WJ	WJ	9/11/2015	
TWO PLACE DECIMAL ± .030		CHECKED	WJ	9/11/2015	
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ	9/11/2015	TITLE:
MATERIAL		THIRD ANGLE:			SHV-5 COAXIAL FEEDTHROUGH, 1 PIN, FLOATING SHIELD, 1.33" CONFLAT FLANGE
FINISH		APPLICATION			
PLATING		NEXT ASSY			USED ON
SURFACE FINISH:		SURFACE FINISH:			63/ OR BETTER
UNLESS OTHERWISE SPECIFIED:		UNLESS OTHERWISE SPECIFIED:			ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES
DWG. NO.		A0326-1-CF		REV	DOWNLOADED FROM MPFPI.COM
Wednesday, October 21, 2020 9:11:25 AM					