
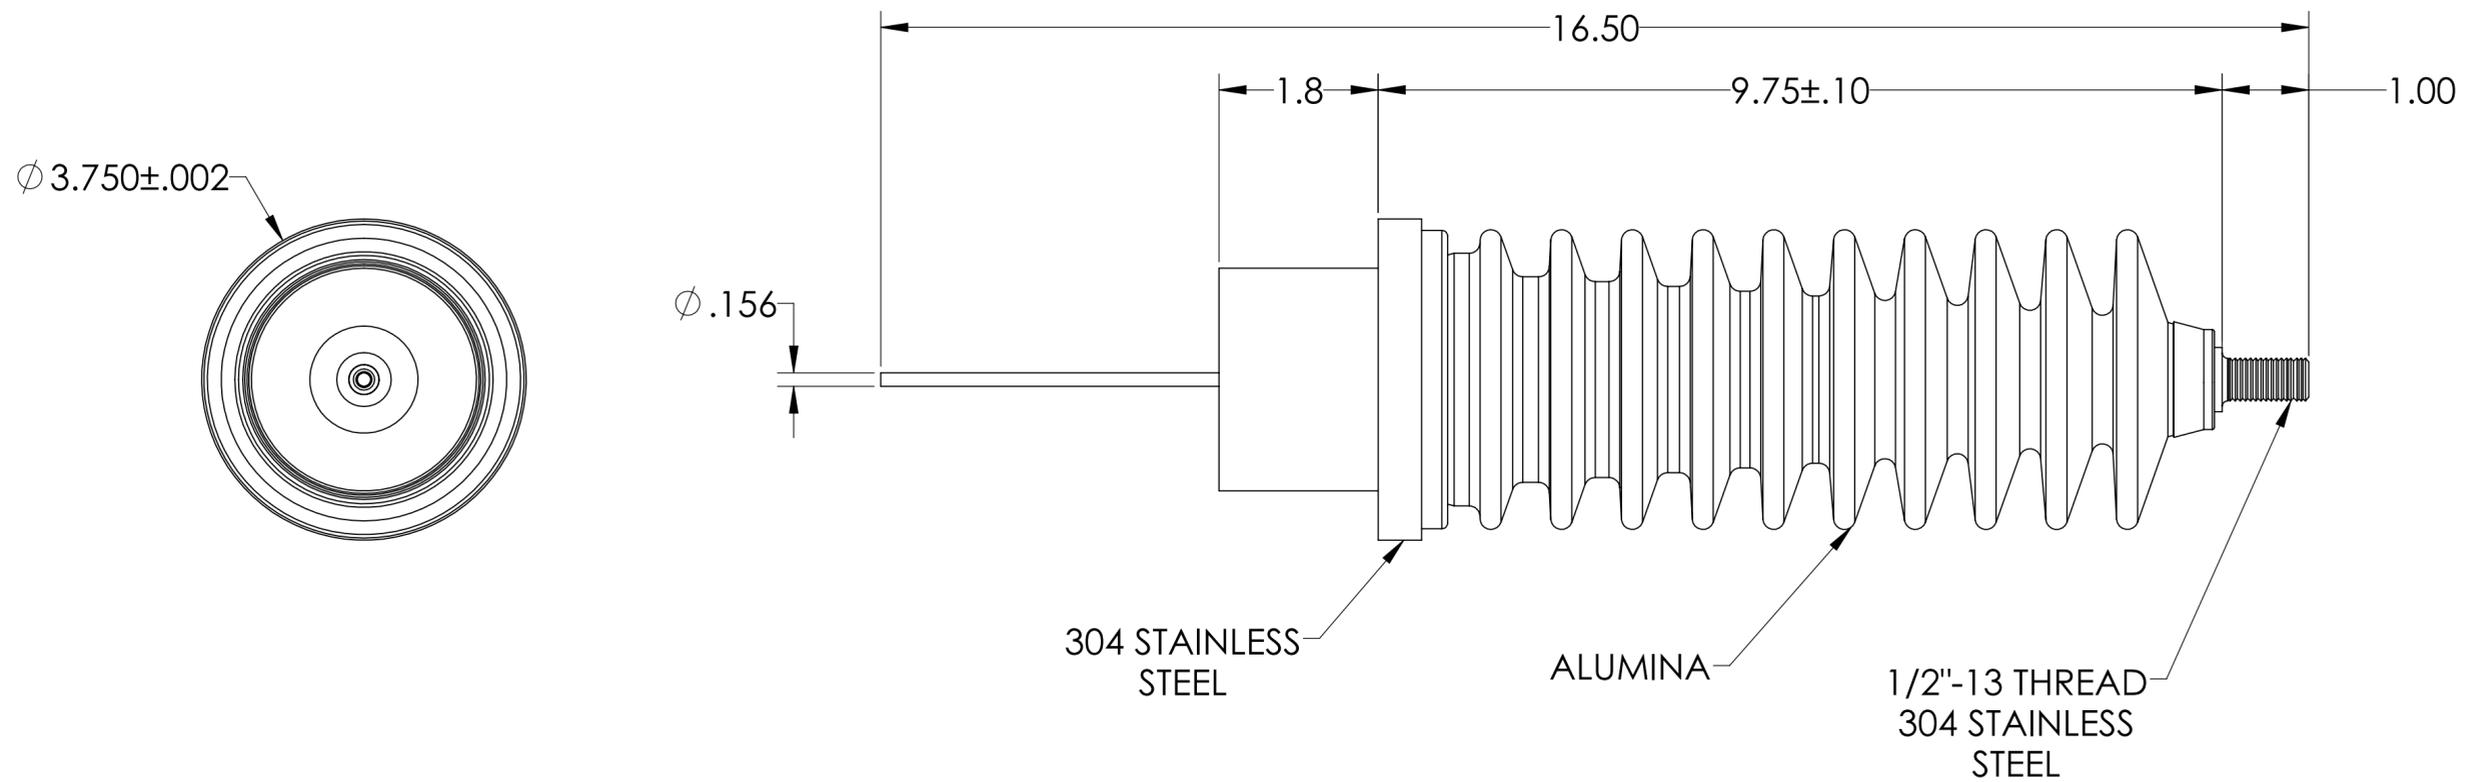


MPF PRODUCTS INC.

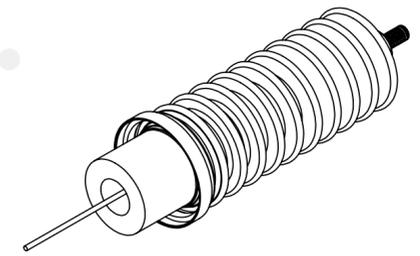

- NOTE:**
1. VOLTAGE: 100,000 VOLTS DC
 2. CURRENT: 6.5 AMPS
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 100 KV, 1 Pin, 0.156" Stn. Stl. Conductor, 3.750" Stainless Steel Weld Adapter, UHV Rated, Bakeable to 450°C

| | | | |
|---|---|--------------|--|
| UNLESS OTHERWISE SPECIFIED: | QUOTATION # | | N/A |
| DIMENSIONS ARE IN INCHES TOLERANCES: | NAME | DATE | MPF PRODUCTS INC. |
| ANGULAR: MACH ± 1/2° | DRAWN | 9/11/2015 | |
| TWO PLACE DECIMAL ± .030 | CHECKED | 9/11/2015 | |
| THREE PLACE DECIMAL ± .015 | ENG APPR. | WJ 9/11/2015 | |
| MATERIAL | THIRD ANGLE: | | POWER FEEDTHROUGH, 100 KV, 1 PIN, 3.750" WELD ADAPTER |
| | | | |
| FINISH | APPLICATION | | DOWNLOADED FROM MPFPI.COM |
| PLATING | NEXT ASSY | | DWG. NO. |
| | SURFACE FINISH: 63/ OR BETTER | | A20323-1-W |
| | UNLESS OTHERWISE SPECIFIED: | | REV |
| | ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES | | Tuesday, May 12, 2020 1:58:57 PM |