
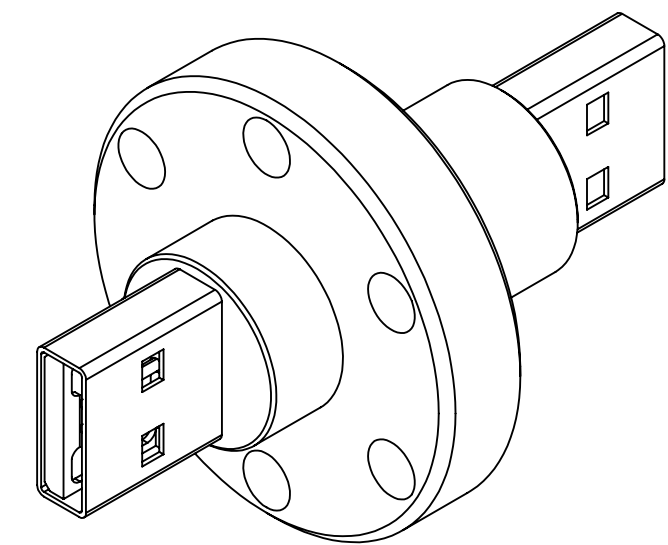
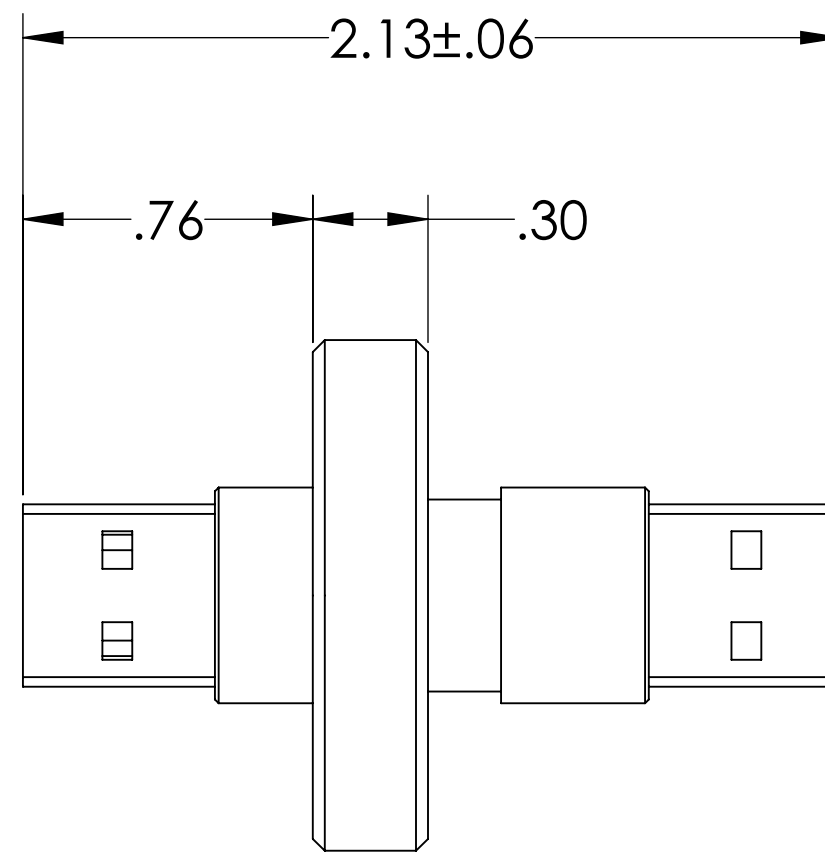


MPF PRODUCTS INC.

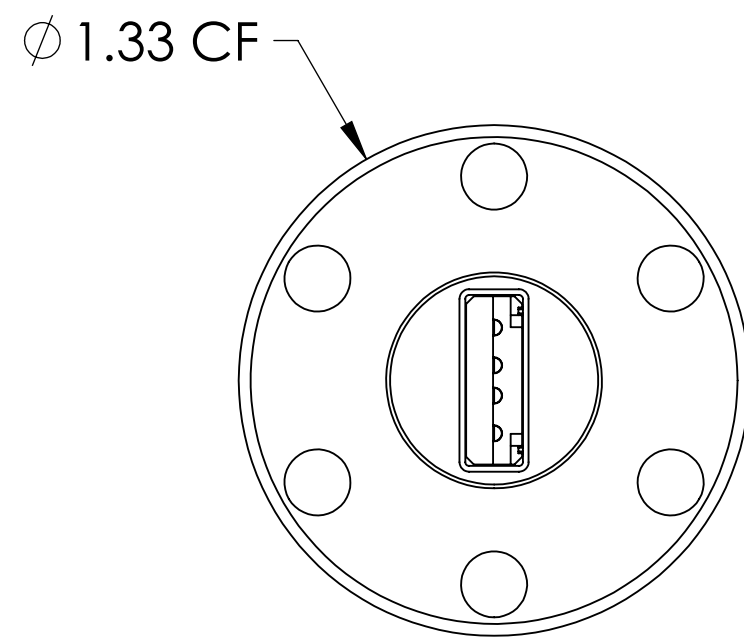

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 30 VOLTS RMS
3. CURRENT: 1 AMP
4. TEMPERATURE RATING: -269 TO 200°C

USB 2.0 Type A Male Feedthrough, Grounded Shield, 1.33" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:		TITLE: USB 2.0 TYPE A MALE FEEDTHROUGH, GROUNDED SHIELD, 1.33" CONFLAT FLANGE
	APPLICATION		DOWNLOADED FROM MPFPI.COM
	NEXT ASSY	USED ON	
FINISH	SURFACE FINISH: 63 OR BETTER		DWG. NO.
PLATING	UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV
	Thursday, June 3, 2021 9:08:58 AM		A22541-1-CF