



# MPF PRODUCTS INC.

**NOTES**

1. MATES WITH HERMETIC MPF FEEDTHRU A8978
2. AVAILIABLE PIN COUNTS 9, 15, 21, 31, 37, 51, 100
3. MATERIALS:
  - A. SHELL POLYETHERETHERKETONE (PEEK)
  - B. CONTACT: BERYLLIUM COPPER
  - C. HARDWARE: STAINLESS STEEL
  - D. WIRE: 28AWG, KAPTON INSULATED
4. ORDERING INSTRUCTIONS  
SPECIFY BASE NUMBER FOLLOWED BY DASH NUMBER INDICATING PIN COUNT  
EXAMPLE A9601 - 9 - 36



PART#	"A" DIM	"B" DIM
A9601-9-36	.795	.300
A9601-15-36	.945	.300
A9601-21-36	1.095	.300
A9601-25-36	1.195	.300
A9601-31-36	1.345	.300
A9601-37-36	1.495	.300
A9601-51-36	1.445	.343
A9601-100-36	2.056	.387

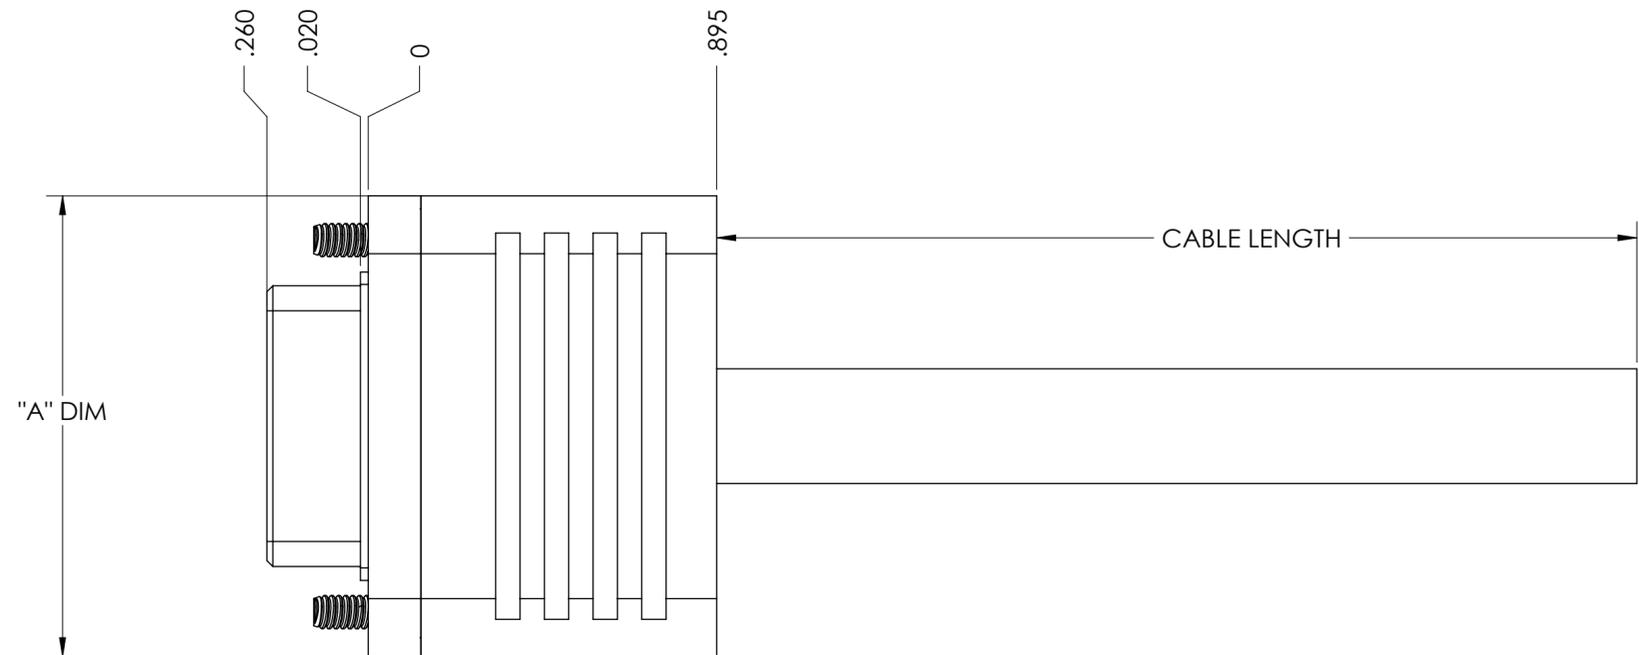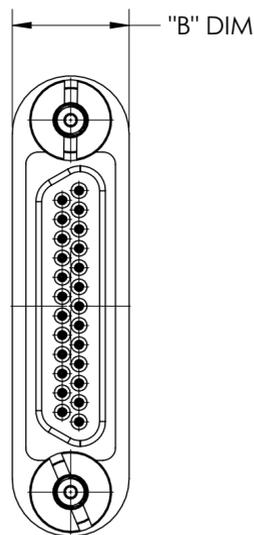

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	APPROVED
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	DRAWN WJ 11/19/2013 CHECKED JB 11/19/2013 ENG APPR. WJ 11/19/2013	DATE	MPF PRODUCTS INC.
MATERIAL	THIRD ANGLE:		TITLE:
SW-Material			VACUUM MICRO D CONNECTOR
FINISH VACUUM CONNECTOR PLATING	SURFACE FINISH: 63 OR BETTER UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	APPLICATION NEXT ASSY USED ON	DOWNLOADED FROM MPFPI.COM DWG. NO. A9601 REV
			Friday, January 14, 2022 2:50:47 PM