
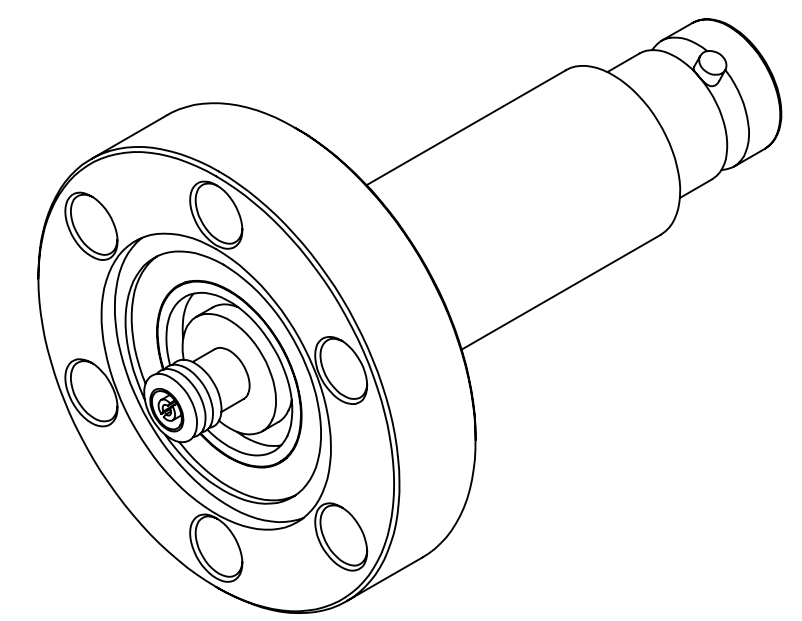


MPF PRODUCTS INC.

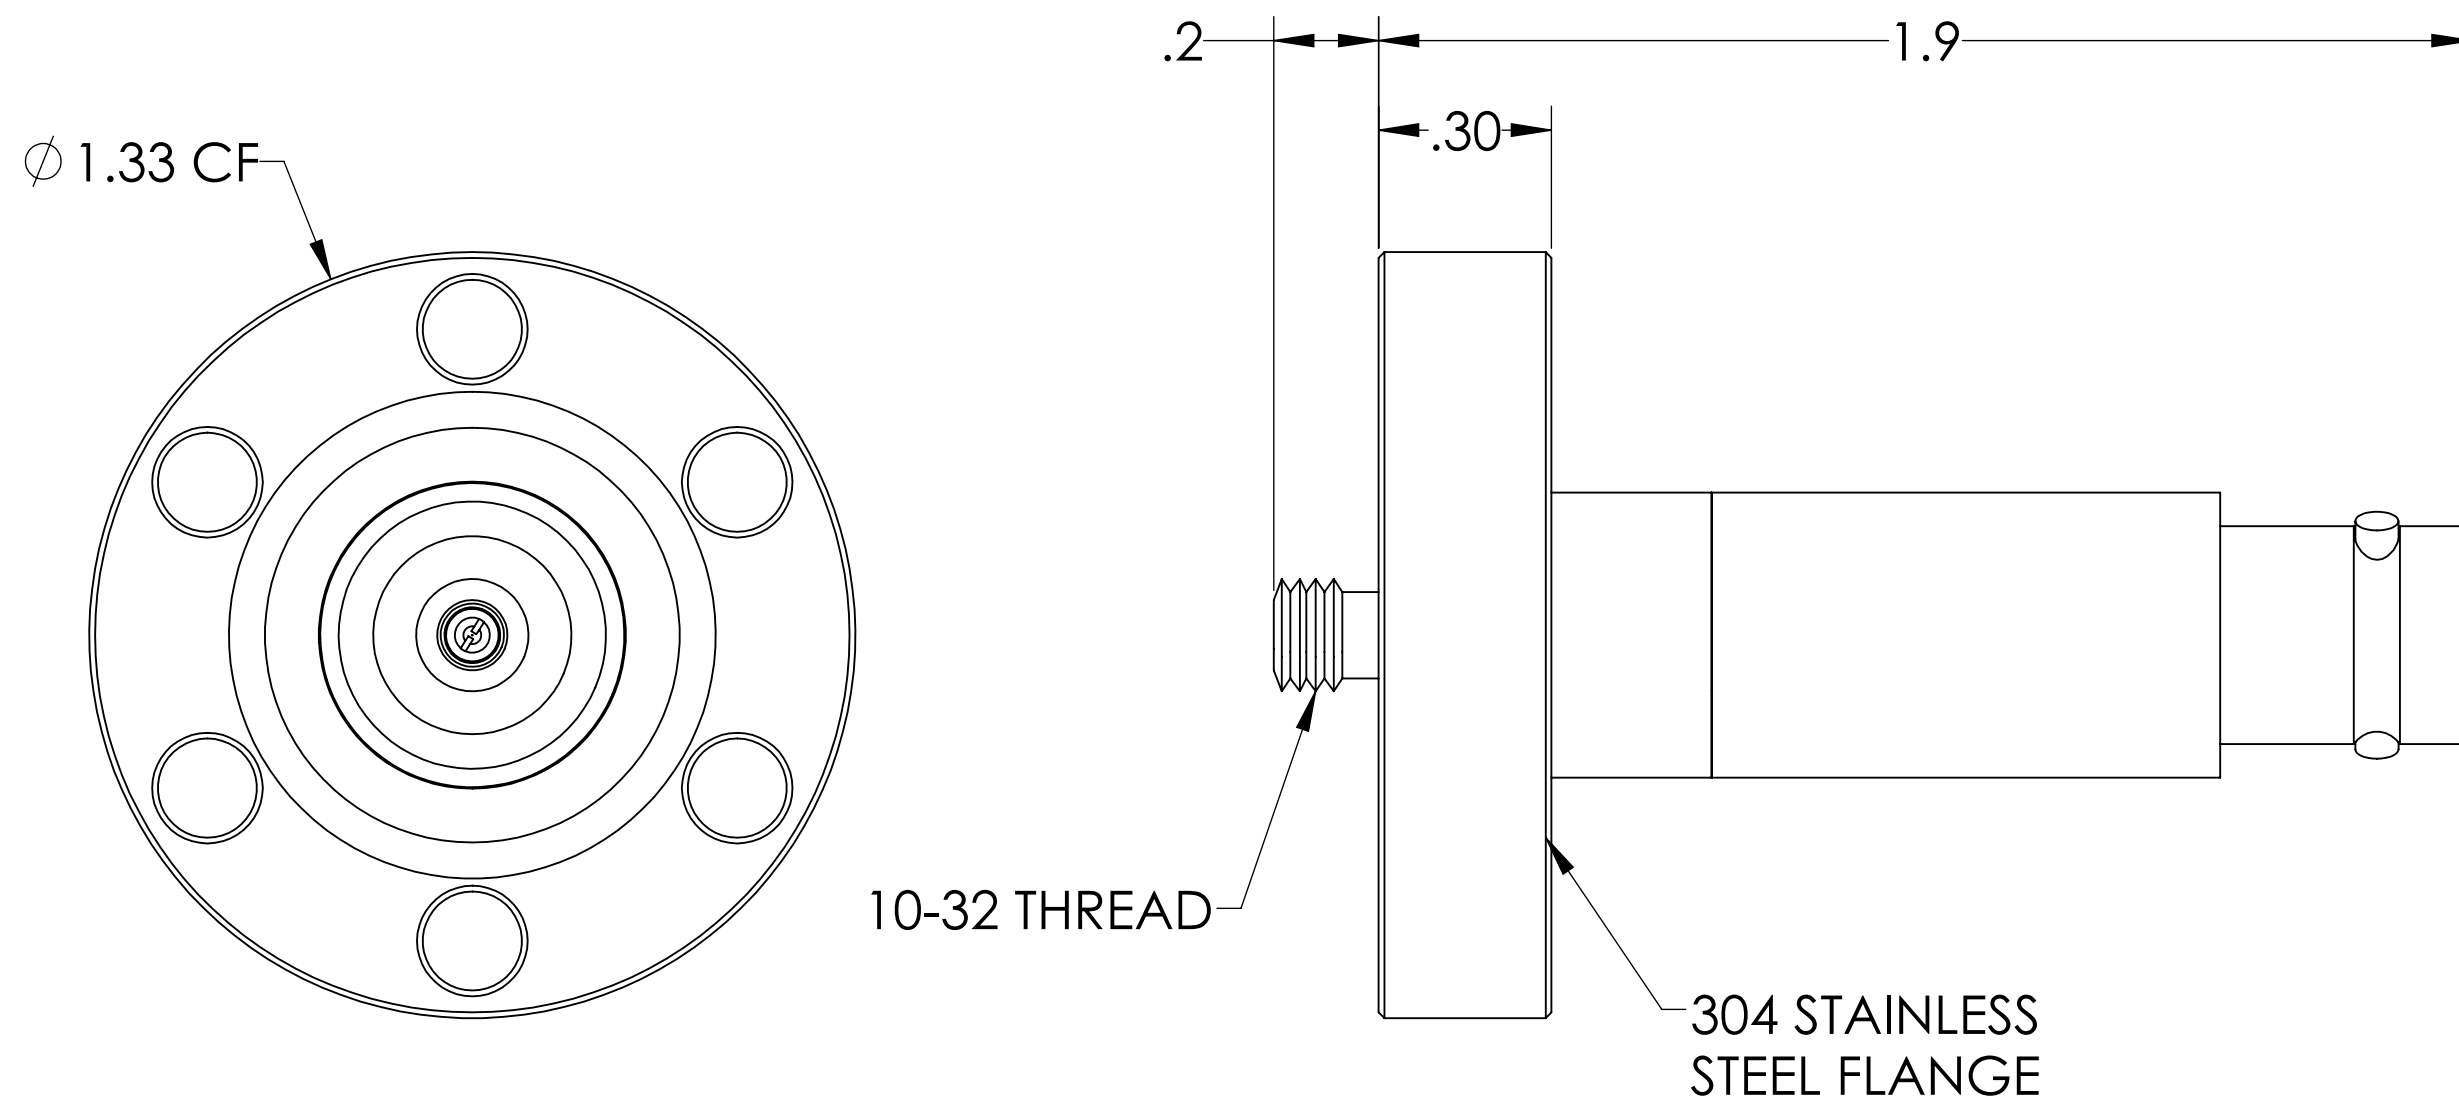


PART #	AIRSIDE CONNECTOR INCLUDED
A2554-1-CF	YES
A2554-2-CF	NO

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 2 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), -65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

BNC-Microdot Coaxial Feedthrough, 1 Pin, Grounded Shield, 1.33" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A					
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE				
ANGULAR: MACH $\pm 1/2^\circ$	WJ	WJ	9/11/2015				
TWO PLACE DECIMAL $\pm .030$	CHECKED		9/11/2015				
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ	9/11/2015				
MATERIAL	THIRD ANGLE:						
FINISH	SURFACE FINISH:	63 OR BETTER					
PLATING	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES					
	APPLICATION	<table border="1"> <tr> <th>NEXT ASSY</th> <th>USED ON</th> </tr> <tr> <td></td> <td></td> </tr> </table>		NEXT ASSY	USED ON		
NEXT ASSY	USED ON						
	TITLE:	MPF PRODUCTS INC. BNC-MICRODOT COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 1.33" CONFLAT FLANGE					
	DOWNLOADED FROM MPFPI.COM	DWG. NO. A2554 REV					
	Friday, January 24, 2020 2:30:14 PM						