
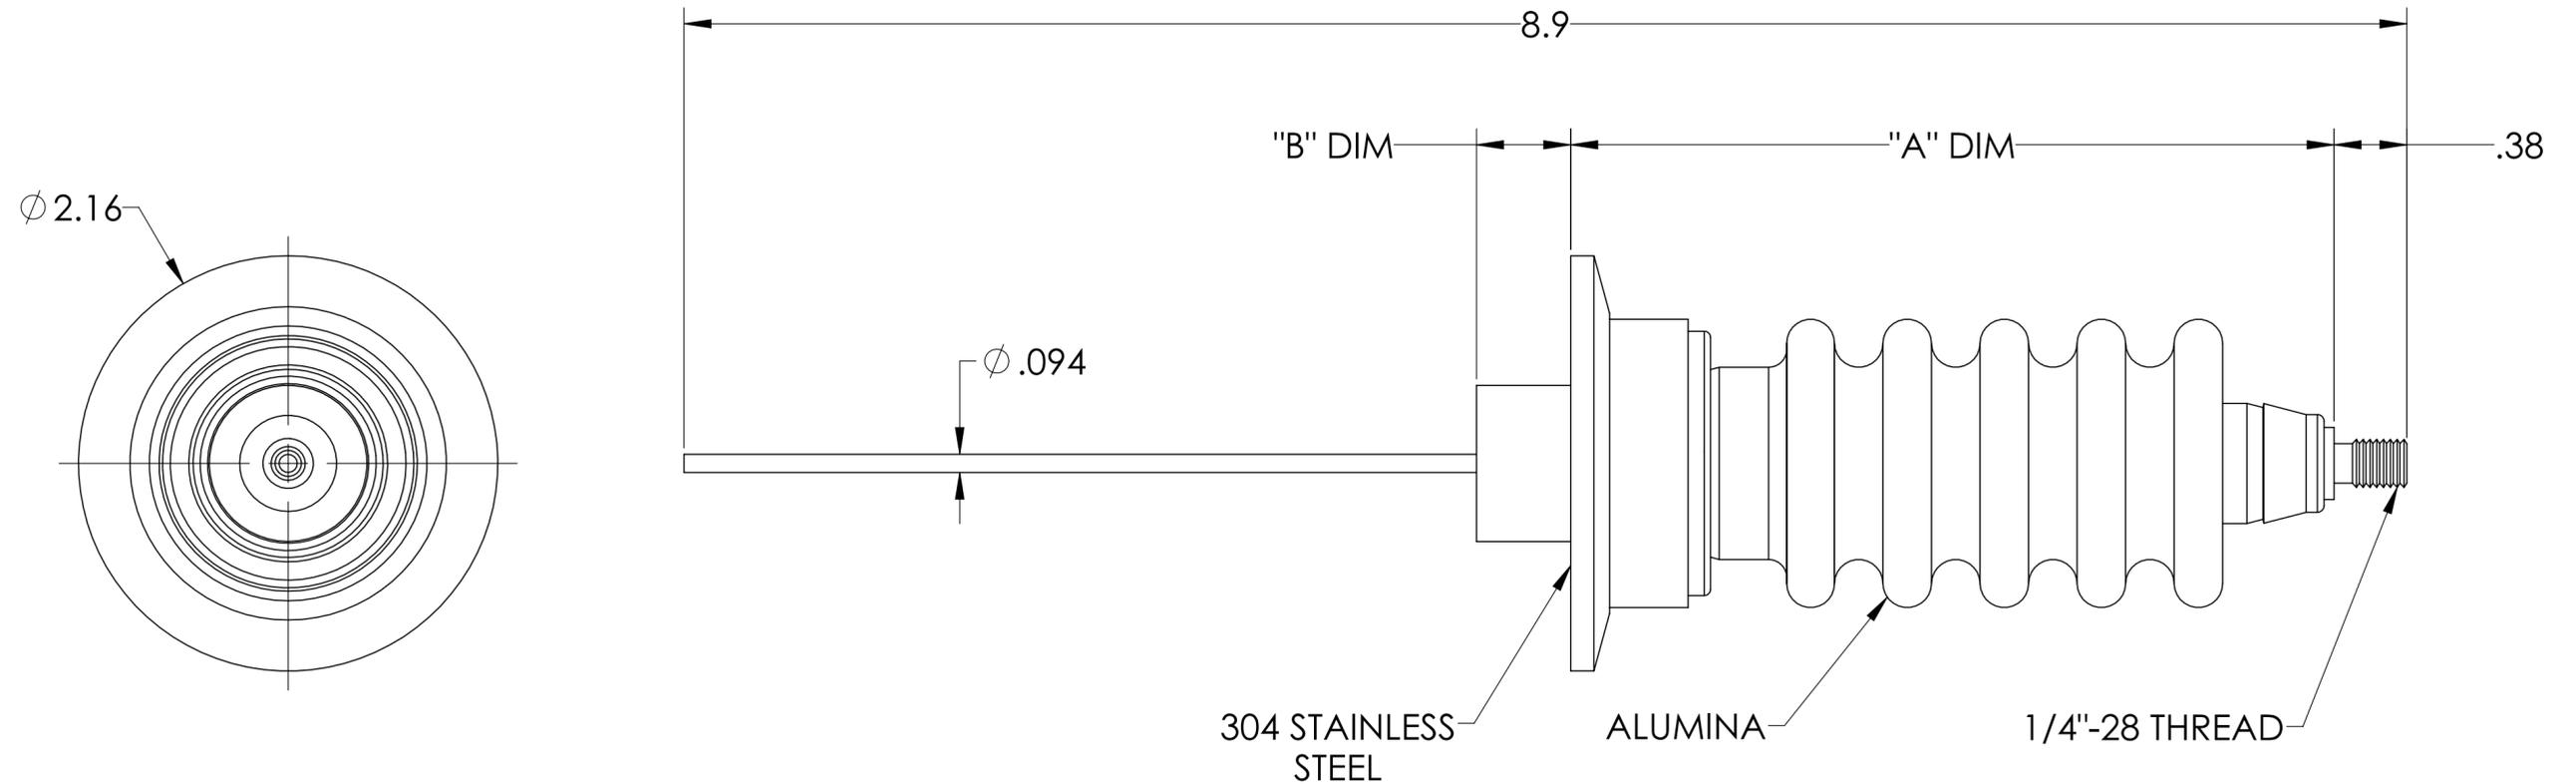


MPF PRODUCTS INC.

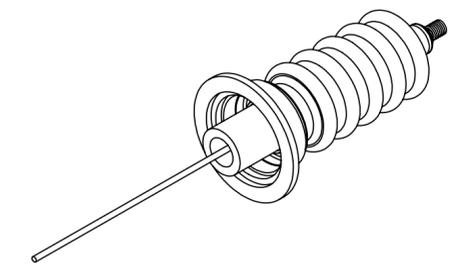

PART #	CONDUCTOR MATERIAL	"A" DIM	"B" DIM	# OF FLUTES	VOLTAGE	CURRENT RATING
A0235-1-QF	OFHC COPPER	2.79	N/A	3	20KV	50 AMPS
A0235-2-QF	304 STN STL	2.79	N/A	3	20KV	3 AMPS
A0235-3-QF	OFHC COPPER	3.29	N/A	4	25KV	50 AMPS
A0235-4-QF	304 STN STL	3.29	N/A	4	25KV	3 AMPS
A0235-5-QF	OFHC COPPER	4.00	.59	5	30KV	50 AMPS
A0235-6-QF	304 STN STL	4.00	.59	5	30KV	3 AMPS

NOTE:
 1. VOLTAGE: SEE TABLE
 2. CURRENT: SEE TABLE
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 20KV, 25KV, and 30KV, 1 Pin, 2.16" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC. TITLE: POWER FEEDTHROUGH, 20KV, 25KV, AND 30KV, 1 PIN, 2.16" QF/KF DOWNLOADED FROM MPFPI.COM DWG. NO. A0235 REV	
ANGULAR: MACH ± 1/2"		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		SURFACE FINISH: 63/ OR BETTER UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
FINISH					
PLATING		APPLICATION		WEDNESDAY, AUGUST 28, 2019 9:19:36 AM SHEET 1 OF 1	
		NEXT ASSY	USED ON		